


- ✓ PROVEN QUALITY
- ✓ ECONOMIC PRICE
- ✓ OFF THE SHELF FUNCTIONALITY

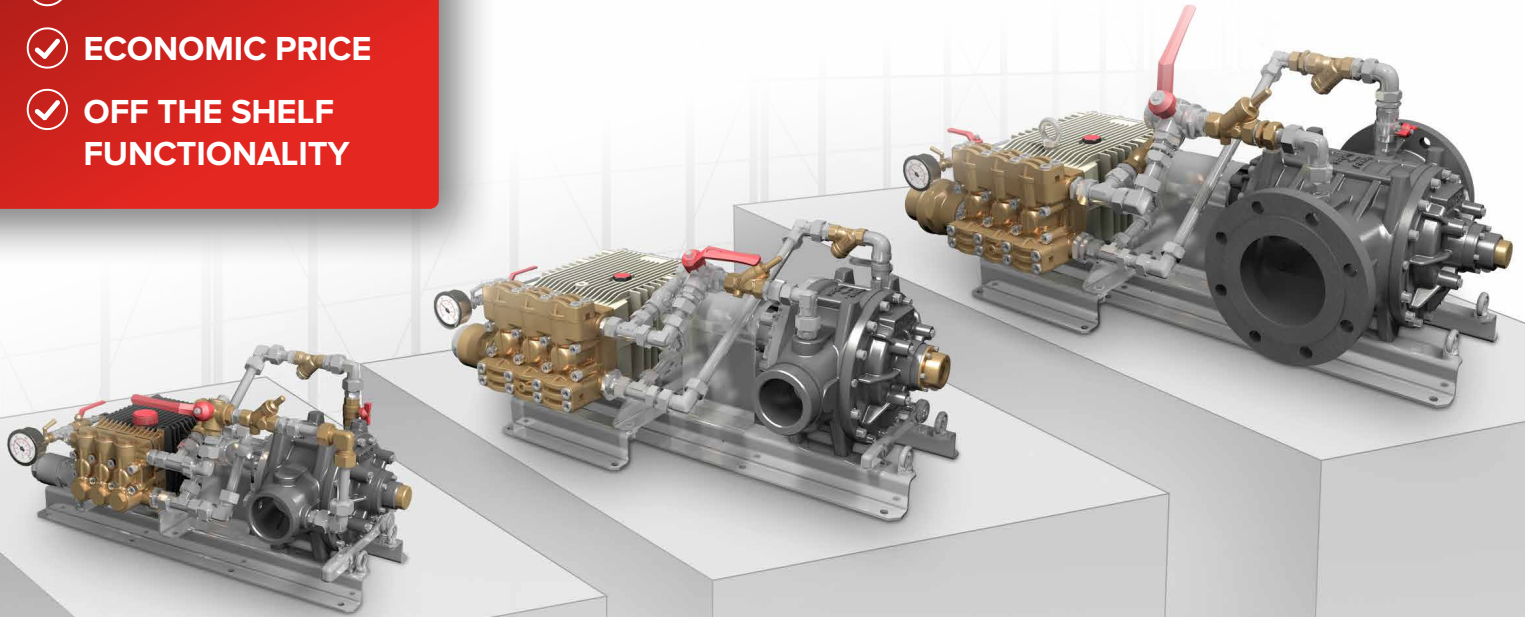

## ■ FIREDOS ECO: BEST CHOICE FOAM PROPORTIONER PROVEN QUALITY, ECONOMIC PRICE

With the proportioning systems of the FireDos Eco series, you are making the right decision. Rely on proven FireDos quality with best price guarantee. Three different sizes with an extinguishing water volume flow of 300 to 4000 l/min are available on stock, enabling easy and environmental friendly testing of the mixing rate.

3 sizes available on stock	Type	Water flow rate
	FDE 1000/3	300 - 1000 l/min
	FDE 2000/3	600 - 2000 l/min
	FDE 4000/3	1000 - 4000 l/min




■ PROVEN QUALITY



■ ECONOMIC PRICE



■ AVAILABLE ON STOCK

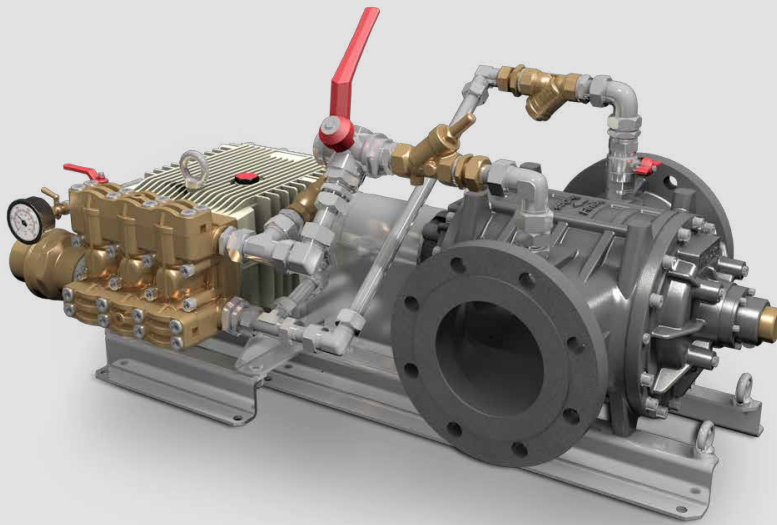

## ■ PURELY MECHANICAL, HIGH RELIABILITY

- Proportioning rate 3 %
- Flow direction left to right
- Working pressure up to 12 bar
- Large flow volume range
- No external energy necessary
- Not effected by pulsation
- Not effected by variation in output height

## ■ IT'S ALL ABOUT FOAM

- For all foam agents within the specified viscosity values
- Consistant proportioning rate
- No calibration of proportioning rate
- Easy and environmental friendly test of mixing rate

**Max. foam agent viscosity <sup>1)</sup>**

Shear rate 5 1/s	2700 mPa*s
Shear rate 50 1/s	460 mPa*s
Shear rate 100 1/s	275 mPa*s
Shear rate 600 1/s	60 mPa*s

1) Foam agents to be used must be below the specified values at all specified points.

PRPE-043-EN-01

## ■ OPTIONAL ACCESSORIES

- Flanges
- Flow meter for digital calculation of the proportioning rate

**CONTACT  
YOUR FIREDOS  
REPRESENTATIVE:**

Ph.: +49 6036 9796-0

Email: [info@firedos.de](mailto:info@firedos.de)

